



睿珀机电
SHANGHAI AGRIPOWER

Diesel generating set

AG-93.8C/S

400V/50Hz Main power/Cummins 6BT5.9-G2



ISO14001:2015

ISO9001 :2015

OHSAS 18001:2007

Product features

Operative norm:

- ISO 8528:AC generator set driven by reciprocating internal combustion engine
- IEC 60034-1:Basic technical requirements for rotating motors
- YD/T 502: Communication diesel generator set
- GB/T 20136-2006 General test method for internal combustion engine power stations

Merit:

1. Integrated building block structure design, small volume, compact structure, sophisticated technology;
2. Few parts, light weight, low failure rate and low maintenance cost;
3. Supercharging and supercharging intercooling technology as the leading products, strong power;
4. High-performance damping system and rigid base, small vibration;
5. Efficient fuel supply system and air intake system, fuel atomization and air mixing more fully, more complete combustion, lower emissions;
6. Standardized design, comprehensive and intelligent products, parts and components have strong versatility, easy installation and easy maintenance;
7. maintenance-free battery, with fast start performance;

Website: <http://www.china-agripower.com>

Add: Bldg 38th, No.900 Haili Rd, Shanghai CN. T:+86-21- 67290268 F:+86-21-67290269



Technical parameters of the unit

Generator set

Generator model:...	AG-93.8C/S	Main power(kW):...	75
Standby power(kW):...	83	unit capacity(kVA):...	93.8
Rated speed(rpm):.....	1500	Rated frequency(Hz):...	50
voltage(V):.....	400	rated current(A):.....	135.3
Power factor(cosφ):.....	0.8(lag)	Wiring mode:.....	3 phase 4 wire
Generator weight (kg).....	1205	Minimum smoke pipe diameter (mm).....	1×φ80
air intake(m³/min):.....	157.9	Air exhaust(m³/min):.....	151.9
Generator size(mm):.....	2900*1100*1650	Recommended base size(mm):.....	2800L×1200

Unit performance index (G2)

Parameter		unit	Oerformance index
Frequency drop		%	≤5
Steady state frequency band		%	≤1.5
Relative frequency setting drop range		%	≥3.5
Relative frequency setting rise range		%	≥2.5
Transient frequency deviation	100% sudden power reduction	%	≤+12
	Surge power		≤-10
Frequency recovery time		s	≤5
Relative frequency tolerance band		%	2
Steady-state voltage deviation		%	≤±2.5
Voltage unbalance degree		%	1
Transient voltage deviation	100% sudden power reduction	%	≤+25
	Surge power		≤-20
Voltage recovery time		s	≤6
Voltage modulation		%	0.3
Relative voltage setting range		%	≤±5
Voltage setting rate of change		%/s	0.2~1
Telephone harmonic factor	THF	%	<2
Telephone influence	TIF	—	<50



Engine technical parameters

Engine

Manufacturer:.....	Cummins
Model:.....	6BT5.9-G2
Engine structure:.....	four-stroke
Number :.....	6/L
Displacement:L.....	5.9
Cylinder diameter:mm.....	102
Stroke:mm.....	120
Compression ratio:.....	17.3: 1
Speed:rpm.....	1500
Primary/standby power ::kW.....	86/92
Speed regulation mode::.....	E
Cooling method:.....	closed water cooling
Dry weight (engine only) : kg.....	411

Start the system

Starting rated power:kW.....	6
Starting rated voltage:V.....	DC24

Fuel system

Fuel injection form: high pressure common rail.....	
Fuel return flow:L/min.....	0.5

Fuel consumption

Engine output	L/h	g/kwh
100%	22.3	214
75%	16.9	216
50%	11.3	217
25%	6.5	248

Intake system

Maximum allowable intake resistance (clean filter element) : kPa.....	3.7
Intake air flow: m ³ /min.....	6

Lubrication system

Total lubrication system capacity: L.....	16
Maximum allowable oil temperature :°C.....	121

Cooling system

Engine coolant volume: L.....	22
Coolant flow: L/min.....	120

Exhaust system

Maximum exhaust back pressure: kPa.....	10
Exhaust flow: kg/min.....	15
Exhaust temperature: °C.....	526


Technical parameters of generator

Dynamo

*50Hz,AC400V,cosφ=0.8

MODEL	Rated power(kW)	Standby power(kW)	Mechanical efficiency(%)	Insulation /temperature rise	Class of protection	Weight(kg)
LEROYSOMER : TAL-A44D	75	82	88.9	H/H	IP21	335

Size and weight

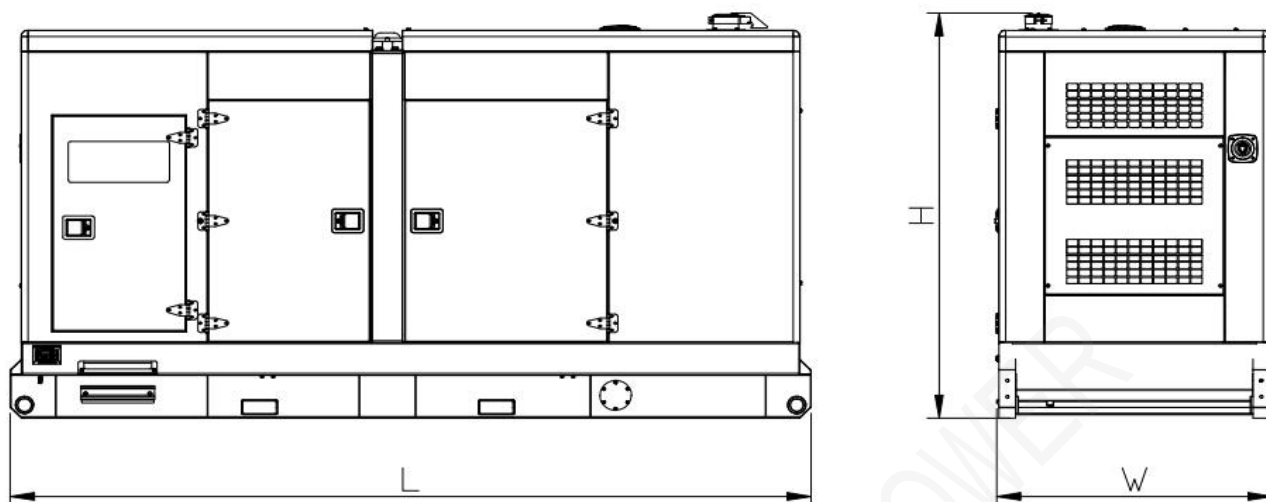

* The above figure is for reference only, the actual size and weight are subject to the final design drawing.

Model	Engine model	size (L×W×H) (mm)	Dry weight (kg)	Wet weight (kg)
AG-93.8C/S	6BT5.9-G2	2900*1100*1650	1165	1205

Special instructions

1. Main power (PRP) is the maximum power that the unit can run continuously with variable load under standard environment (atmospheric pressure, relative humidity, ambient temperature), and the overload of 10% is allowed to run for 1h every 12h.
2. Working conditions and power correction:
 - (1) Altitude: $\leq 1500\text{m}$ ($> 1500\text{m}$), need to do power correction; Power reduction by 10% per 1000m increase)
 - (2) Ambient temperature: 40°C (when $> 40^{\circ}\text{C}$, power correction is required)
 - (3) Relative humidity: $\leq 60\%$
3. When the field use conditions of the diesel generator set do not meet the above conditions, the output power of the unit should be corrected, and the final correction coefficient, please refer to the detailed technical data of the corresponding engine and generator.